

Mono

XTM5-72

Shinetime Solar



15.67%

MAX MODULE EFFICIENCY

200W

MAX POWER OUTPUT

10 YEAR

PRODUCT WARRANTY

25 YEAR

LINEAR POWER WARRANTY



Positive tolerance

Guaranteed power output positive tolerance from 0 to 3%.



Smart auto-recognition of weak light performance

Smart light auto-recognition under the condition of low irradiance and hazy light (mornings, evenings and cloudy days).



Steady resistance to strong hailstone, wind and snow loads

Special frame construction certified to ensure high wind loads (2400 Pa), snow loads (5400 Pa) and hailstone (40mm/4.5m/s).



Certified manufacturing facility

Manufacturing facility certified by TÜV Rheinland to ISO 9001:2008, ISO 14001:2004.

CERTIFICATIONS




ZHEJIANG XIORITAI PHOTOVOLTAIC TECHNOLOGY CO., LTD.
www.shinetimesolar.com



NEW

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty - 25 Year Linear Power Warranty

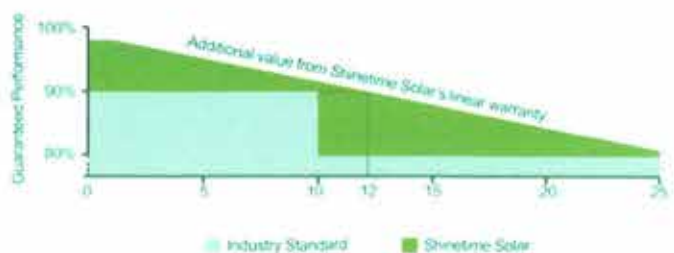


Gsm: +385 91 1414 257
e-mail: mdblazi@gmail.com
Gsm: +385 98 1617 164
e-mail: zabava@vinter.hr


**SUNČANE
ELEKTRANE**
PRODAJA • MONTAŽA • KONZALTING
WWW.PAUK-SOLARNEELEKTRANE.HR

XTM5-72 **Shinetime Solar**

DIMENSIONS OF PV MODULE XTM5-72

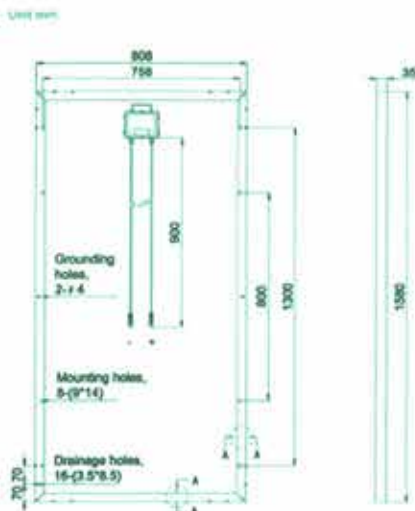

I-V CURVES OF PV MODULE XTM5-72

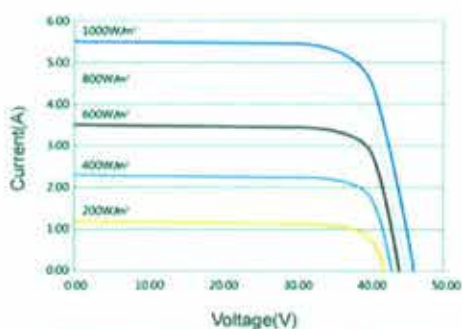

Average efficiency reduction of 4.5% at 200w/m² according to EN 60904-1.

Version No.

XT_M5_72_EU_EN_20120218_V001

ELECTRICAL DATA @ STC	XTM5-72-185	XTM5-72-190	XTM5-72-195	XTM5-72-200
Peak Power Watts P _{max} (Wp)	185	190	195	200
Nominal Power Voltage V _{mp} (V)	36.3	36.5	36.7	36.9
Nominal Power Current I _{mp} (A)	5.10	5.21	5.31	5.42
Open Circuit Voltage V _{oc} (V)	45.10	45.40	45.68	46.10
Short Circuit Current I _{sc} (A)	5.39	5.47	5.51	5.58
Module Efficiency η _p (%)	14.49%	14.86%	15.27%	15.67%

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000w/m², Cell Temperature 25°C).

ELECTRICAL DATA @ NOCT	XTM5-72-185	XTM5-72-190	XTM5-72-195	XTM5-72-200
Maximum Power P _{max} (W)	136	140	143	145
Maximum Power Voltage V _{mp} (V)	33.2	33.8	34.3	34.7
Maximum Power Current I _{mp} (A)	4.10	4.14	4.16	4.22
Open Circuit Voltage V _{oc} (V)	41.3	41.7	42.2	42.6
Short Circuit Current I _{sc} (A)	4.41	4.44	4.47	4.49

NOCT Irradiance at 800w/m², Ambient Temperature 20°C, Wind Speed 1m/s

MECHANICAL DATA

Solar Cells	Monocrystalline 125X125mm (5 inches)
Cell Orientation	72 cells(6X12)
Module Dimension	1580X808X35mm
Weight	16kg
Glass	High transparency and low-iron tempered solar glass 3.2mm(0.13inches)
Frame	Silver colour anodized aluminium alloy
Junction Box	IP 65 rated
Cables	Photovoltaic Technology cable 4.0mm ² (0.006 inches ²) 900mm(35.4 inches)
Connectors	MC4 Compatible / IP65 or MC4 Original / IP67

TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	45±3°C
Temperature Coefficient of P _{max}	-0.41%/K
Temperature Coefficient of V _{oc}	0.21%/K
Temperature Coefficient of I _{sc}	0.047%/K

OPERATING CONDITIONS

Maximum System Voltage	1000V _{DC}
Max Series Fuse Rating	10A
Operational Temperature	-40°C ~ +85°C
Max. Static Load, Front	5400Pa
Max. Static Load, Back	2400Pa
Max. Hailstone Impact	40mm / 4.5m/s

WARRANTY

10 year workmanship warranty
25 year linear performance warranty (12 year 90% power output, 25 year 80% power output)

PACKAGING CONFIGURATION

26pcs per ctn, 2pcs per box, (2ctns+2boxes) per pallet, 14pallets (840pcs) per 40HQ



Gsm: +385 91 1414 257
 e-mail: mdblazi@gmail.com
 Gsm: +385 98 1617 164
 e-mail: zabava@vinter.hr

**SUNČANE
ELEKTRANE**
 PRODAJA • MONTAŽA • KONZALTING
 WWW.PAUK-SOLARNEELEKTRANE.HR